

HS-K8130L6主板


产品特性:

- 英特尔8代酷睿™ i3 处理器 (Kaby Lake R)
- 支持6*USB(2*USB2.0排针/4*USB3.0接口)
- 支持6*LAN(Intel I211,1Gbps/100Mbps/10Mbps以太网控制器)



HS-K8130L6主板规格

板型尺寸	120mm*120mm
处理器	英特尔8代酷睿™ i3 处理器 (Kaby Lake R)
内存	DDR4 upto 2400 MT/s 最大内存64GB
BIOS	AMIBIOS 64Mbit 闪存
内置I/O接口	1*Front panel排针 1*JSATA供电接口 1*SATA数据接口 2*DDR4插槽 1*CPU_FAN排针 1*JCMOS排针 2*USB2.0排针
外置I/O接口	4*USB3.0接口 1*TJ45COM1接口 1*HDMI接口 6*LAN口 1*DC 12V接口
集成网卡	6*Intel I211,1Gbps/100Mbps/10Mbps以太网控制器
扩展槽/口	1*MINI PCIE(WiFi)插槽/1*MINI PCIE(MSATA)插槽
操作系统	win10/win11, Linux

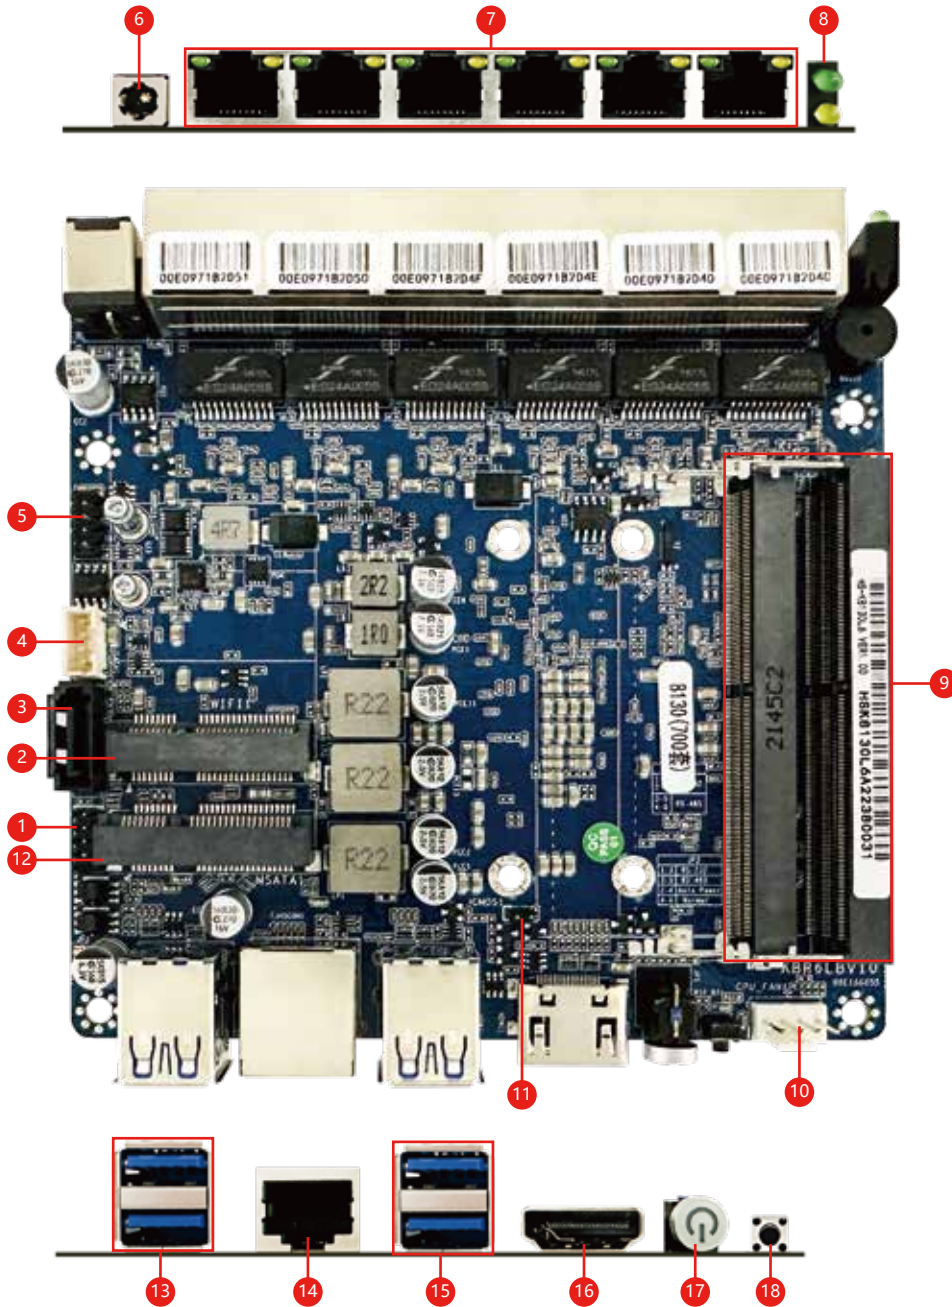

1	Front panel排针
2	MINI PCIE(WiFi)插槽
3	SATA数据接口
4	JSATA供电接口
5	FUSB2.0排针
6	DC 12V接口
7	LAN口
8	LED指示灯
9	DDR4内存槽
10	CPU_FAN排针
11	JCMOS排针
12	MINI PCIE(MSATA)插槽
13	USB3.0接口
14	TJ45COM1接口
15	USB3.0接口
16	HDMI接口
17	电源键
18	RST开关

HS-K8130L6主板定义

(1) Front panel排针

Location	Pin	Definition	Pin	Definition
FP1 (2.54mm)	1	3.3V	2	Power LED
	3	Hard Disk Drive LED	4	GND
	5	Reset Switch	6	Power Switch
	7	GND	8	GND
	9	NC		

(4) SATAPWR供电接口

Location	Pin	Definition
SATAPWR	1	+V5S
	2	GND
	3	GND
	4	+12V

(5) FUSB1排针

Location	Pin	Definition	Pin	Definition
FUSB1 (2.54mm)	1	5V_RUN	2	5V_RUN
	3	USB_PN4	4	USB_PN5
	5	USB_PP4	6	USB_PP5
	7	GND	8	GND
	9	NC	10	GND

(10) CPU_FAN排针

Location	Pin	Definition
CPU_FAN1	1	GND
	2	+12V
	3	FAN_TAC
	4	FAN_CTL

(11) JCMOS排针

Location	Pin	Definition
JCMOS1 (2.54mm)	1	GND
	2	RTCRST_N