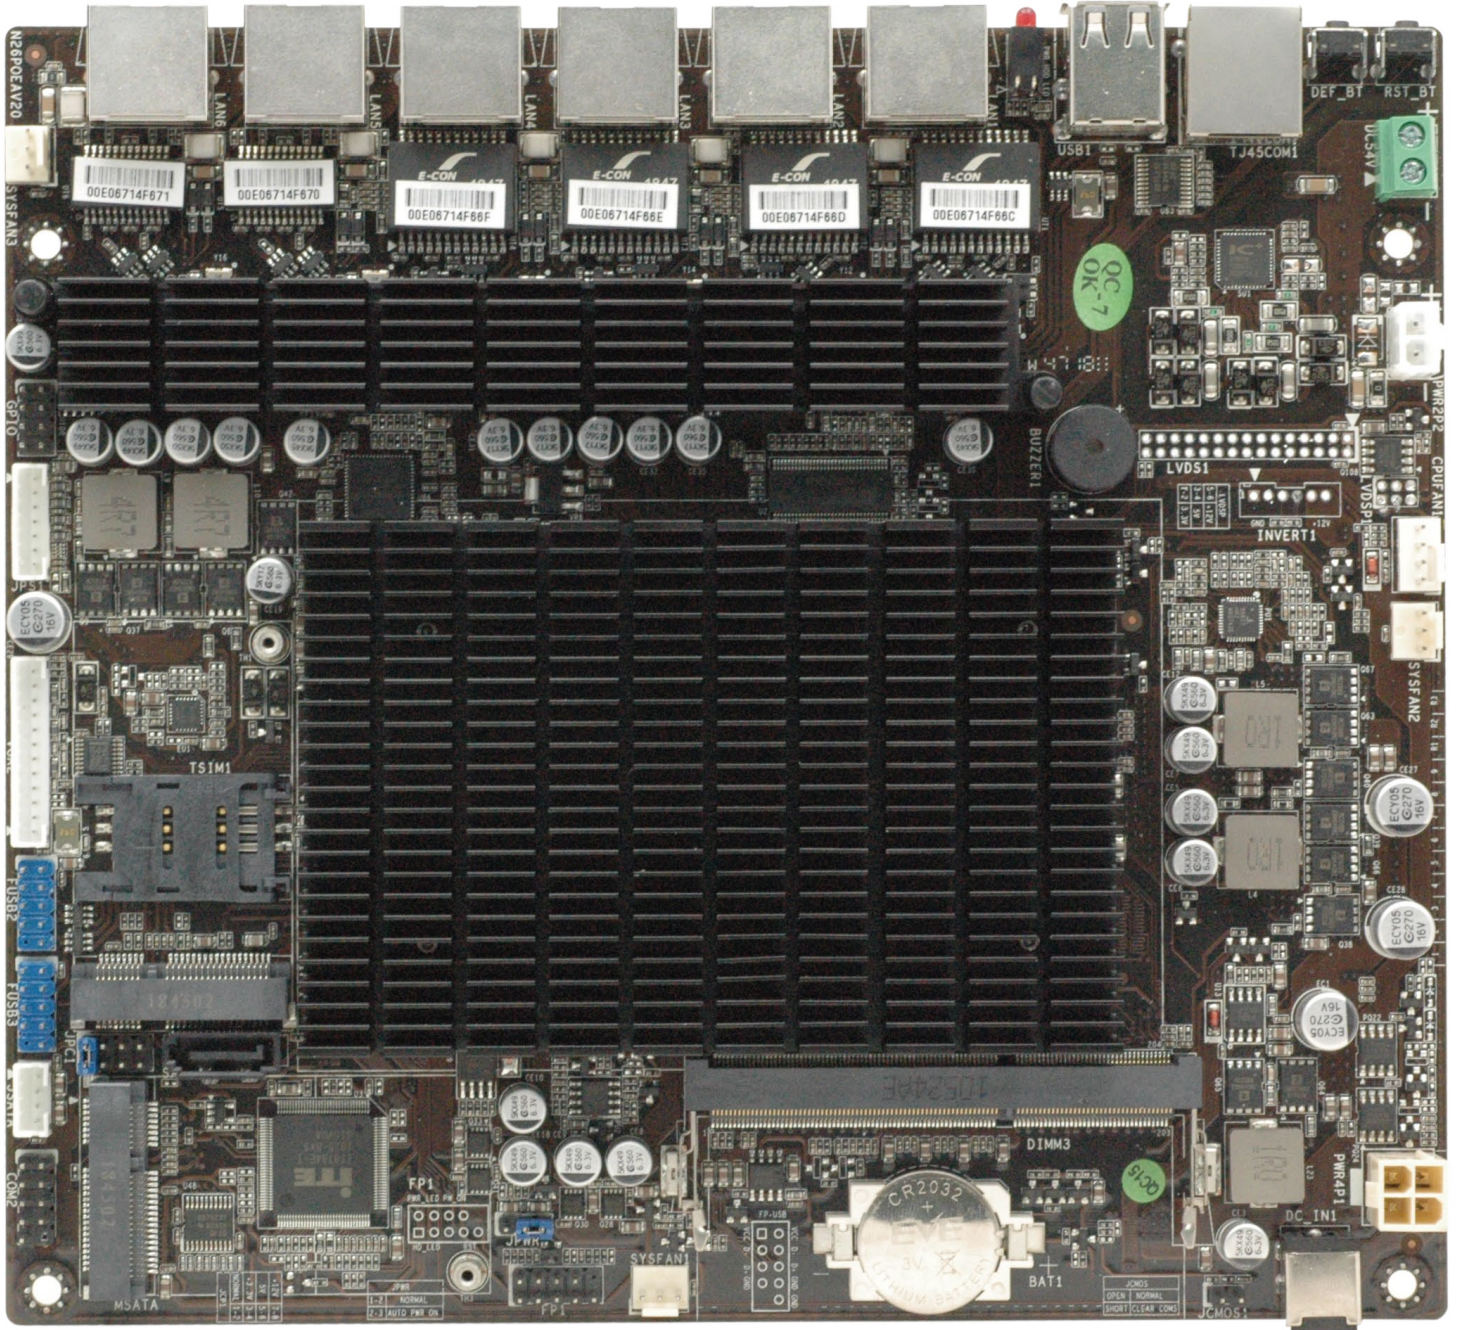


ZA-N26POEL6 Motherboard

User Manual

Intel® Atom N2600 1.6GHz Processor

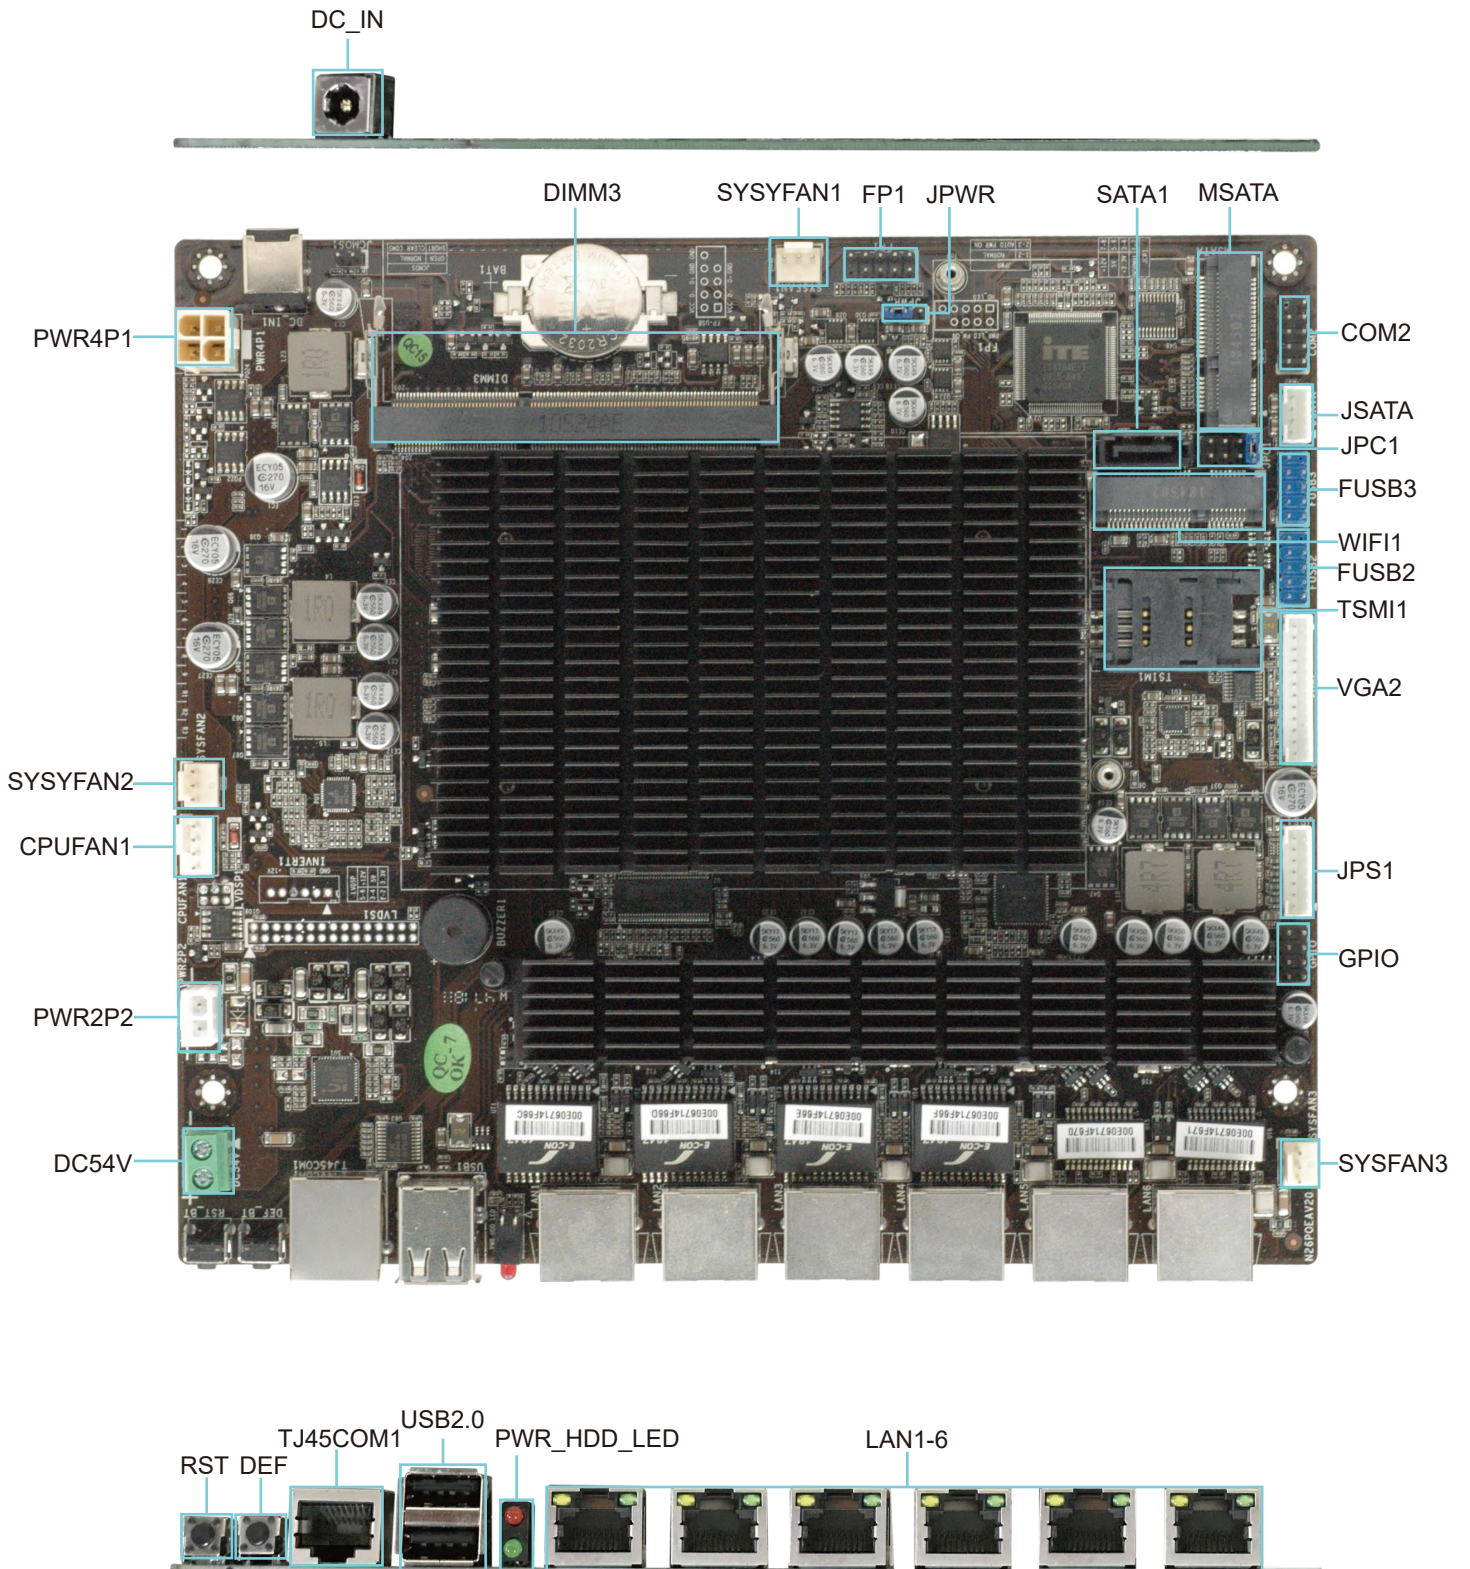
ZA-N26POEL6 Motherboard Diagram

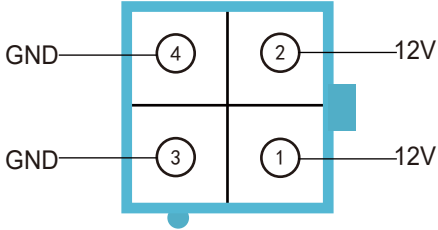
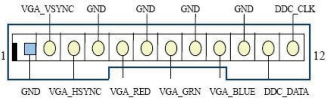



产品特性

Size	210mm x 180mm
CPU	Intel Atom N2600 1.60GHz Processor(1M)
Graphics	Intel HD Graphics
Chipset	N2600
Memory	1*DDR3 1066/1333/1600MHz,Up to 8GB
Internal I/O	<ul style="list-style-type: none"> 1*CPU Fan 3*SYS Fan 1*2X2Pin power input port 1*2Pin power input port 1*JMOS1Pin 1*Front panel Pin 1*COM Pin 1*SATA Port 1*JSATA Pin 2*USB PIN,Support 4* USB2.0 1*1X12VGA Pin 1*JPS1Pin 1*TSIM1slot 1*GIPO Pin 1*2XPin Port 1*Power input
Rear I/O	<ul style="list-style-type: none"> 1*DC Power Input (12V) 6*LAN WG82583 10/100/1000 2*USB2.0 Port 1*RJ45 COM1 Port 1*PWR_BT 1*PST_GP
BIOS AMI	AMIBIOS,64M bit Flash Memory
MINI_PCIE	<ul style="list-style-type: none"> 1* Support MSATA 1* Support WiFi
SATA	1*SATA
LAN	6*LAN WG82583 10/100/1000M Port
Audio	ALC662 Dual Channel Output
Operating System	<ul style="list-style-type: none"> Windows7 Windows8 Linux
H/W Monitoring	<ul style="list-style-type: none"> Walk in LAN System Power Management Temperature Management Voltage Management
Humidity	0% ~ 95% (Relative Humidity,No Condensation)
Temp	-10°C ~ 55°C

Motherboard I/O Interface Diagram



<p>JCP1</p>	<table border="1" style="margin: auto;"> <thead> <tr> <th colspan="2">JCP1</th> </tr> </thead> <tbody> <tr> <td>1-2</td> <td>NORMAL</td> </tr> <tr> <td>2-3</td> <td>+3.3V</td> </tr> <tr> <td>5-6</td> <td>5V</td> </tr> <tr> <td>7-8</td> <td>+12V</td> </tr> </tbody> </table>	JCP1		1-2	NORMAL	2-3	+3.3V	5-6	5V	7-8	+12V																		
JCP1																													
1-2	NORMAL																												
2-3	+3.3V																												
5-6	5V																												
7-8	+12V																												
<p>DC1</p>	<div style="text-align: center;">  </div> <table border="1" style="margin: auto;"> <thead> <tr> <th>Pin</th> <th>Define</th> <th>Pin</th> <th>Define</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12V</td> <td>2</td> <td>12V</td> </tr> <tr> <td>3</td> <td>GND</td> <td>4</td> <td>GND</td> </tr> </tbody> </table>	Pin	Define	Pin	Define	1	12V	2	12V	3	GND	4	GND																
Pin	Define	Pin	Define																										
1	12V	2	12V																										
3	GND	4	GND																										
<p>VGA</p>	<div style="text-align: center;">  </div> <table border="1" style="margin: auto;"> <thead> <tr> <th>Pin</th> <th>Define</th> <th>Pin</th> <th>Define</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>GND</td> <td>2</td> <td>VGA_VSYNC</td> </tr> <tr> <td>3</td> <td>VGA_HSYNC</td> <td>4</td> <td>GND</td> </tr> <tr> <td>5</td> <td>VGA_RED</td> <td>6</td> <td>GND</td> </tr> <tr> <td>7</td> <td>VGA_GRN</td> <td>8</td> <td>GND</td> </tr> <tr> <td>9</td> <td>VGA_BULE</td> <td>10</td> <td>GND</td> </tr> <tr> <td>11</td> <td>DDC_DATA</td> <td>12</td> <td>DDC_CLK</td> </tr> </tbody> </table>	Pin	Define	Pin	Define	1	GND	2	VGA_VSYNC	3	VGA_HSYNC	4	GND	5	VGA_RED	6	GND	7	VGA_GRN	8	GND	9	VGA_BULE	10	GND	11	DDC_DATA	12	DDC_CLK
Pin	Define	Pin	Define																										
1	GND	2	VGA_VSYNC																										
3	VGA_HSYNC	4	GND																										
5	VGA_RED	6	GND																										
7	VGA_GRN	8	GND																										
9	VGA_BULE	10	GND																										
11	DDC_DATA	12	DDC_CLK																										
<p>FUSB1</p>	<div style="text-align: center;">  </div> <table border="1" style="margin: auto;"> <thead> <tr> <th>Pin</th> <th>Define</th> <th>Pin</th> <th>Define</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>VCC</td> <td>2</td> <td>VCC</td> </tr> <tr> <td>3</td> <td>DATA 0-</td> <td>4</td> <td>DATA1-</td> </tr> <tr> <td>5</td> <td>DATA0+</td> <td>6</td> <td>DATA1+</td> </tr> <tr> <td>7</td> <td>GND</td> <td>8</td> <td>GND</td> </tr> <tr> <td>9</td> <td>NC(CUT)</td> <td>10</td> <td>GND</td> </tr> </tbody> </table>	Pin	Define	Pin	Define	1	VCC	2	VCC	3	DATA 0-	4	DATA1-	5	DATA0+	6	DATA1+	7	GND	8	GND	9	NC(CUT)	10	GND				
Pin	Define	Pin	Define																										
1	VCC	2	VCC																										
3	DATA 0-	4	DATA1-																										
5	DATA0+	6	DATA1+																										
7	GND	8	GND																										
9	NC(CUT)	10	GND																										

*Other Matters Please consult the sales.